

## WIDE WALL BAR


### 54x3W RGB Waterproof Mini Wall Washer

The Centolight **WideWall Bar** is a compact yet powerful lighting fixture designed to deliver exceptional wall coverage and vibrant effects.

Equipped with 54x3W high-brightness 3-in-1 RGB LEDs and a 10°x60° beam angle, this unit creates stunning washes of color across large surfaces, making it perfect for stages, architectural lighting, event decoration, and outdoor installations. Despite its small size, it packs advanced features, including IR remote control for effortless operation, multiple DMX channel modes (3, 5, 8, or 13), 10 built-in automatic programs, and 55 color presets.

Built with advanced waterproof construction—without reliance on insulating glue this IP65-rated aluminum body ensures reliability and durability even in challenging weather conditions. With variable electronic strobe, dimming curves, color balance adjustment, and smooth color transitions, it offers unmatched versatility. Operate the fixture in DMX, master/slave, or Stand-alone modes, with selectable refresh rates for flicker-free performance in live events and filming scenarios.

Whether you're lighting up a wall for dramatic effects, enhancing an outdoor party, or adding color to an architectural façade, the **WideWall Bar** delivers professional grade performance in a compact package.

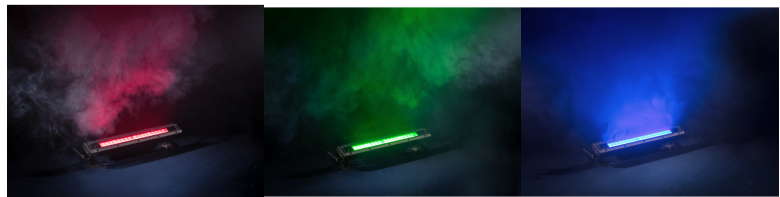

## PRODUCT DETAILS

### Key features

54 x 3W high brightness R/G/B 3in1 LEDs

10°x60° beam angle with silicon lens

3, 5, 8, or 13-channel DMX modes

10 integrated automatic programs and 55 color presets

IR Remote Control

Selectable refresh rate for Flicker-Free operation

Variable electronic strobe, dimming and color changing effect

Stand-alone, Master/Slave and DMX modes

Smart temperature control

IP65

Aluminum die cast body

## Specifications

<b>Input Voltage</b>	AC110-240V, 50-60Hz
<b>Power Consumption</b>	150W
<b>LEDs</b>	54x3W, high brightness 3in1 RGB LEDs
<b>Lens</b>	10°x60° silicon
<b>Material</b>	Aluminum
<b>Ambient Temperature</b>	-20°C - 40°C
<b>DMX Channels</b>	3CH / 5CH / 8CH / 13CH
<b>Control Mode</b>	DMX, Master/Slave, Auto, Remote Control
<b>DMX Connectors</b>	Waterproof 3-pin XLR Input/Output
<b>Power Connectors</b>	Waterproof Truecon Input/Output
<b>IP Grade</b>	IP65
<b>Protection Class</b>	1
<b>Fixture Dimensions (WxDxH)</b>	395 x 53 x 85,08 mm( 15.5 x 2.1 x 3.35 in.)
<b>Dimensions with handles, barndoor and bracket (WxDxH)</b>	428 x 53 x 192.6 (16.85 x 2.1 x 7.58 in.)
<b>Packing Dimensions (WxDxH)</b>	460 x 143 x 140 mm(18.11 x 5.63 x 5.5 in.)
<b>Product Weight</b>	2.1 kg – 4.6 lbs.
<b>Package Weight</b>	2.7 kg – 5.9 lbs.